



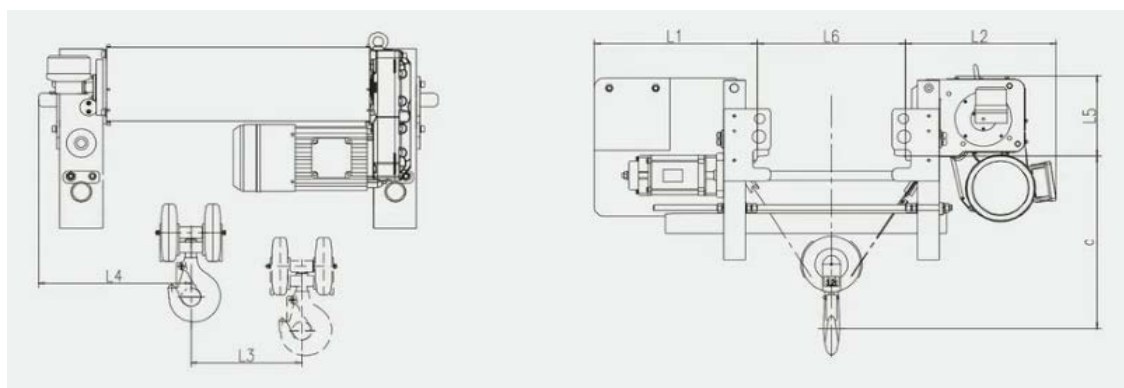


Product Parameter

Model	Working duty FEM(ISO)	Lifting speed (m/min)	Lifting motor (kW)	Traveling speed (m/min)	Traveling motor (kW)	Weight (kg)
SL-03-6M	2m(M5)	0.8/5	0.45/3.2	5-20	0.4	292
SL-03-9M	2m(M5)	0.8/5	0.45/3.2	5-20	0.4	300
SL-03-12M	2m(M5)	0.8/5	0.45/3.2	5-20	0.4	320

Product size

Model	L1(mm)	L2(mm)	L3(mm)	L4(mm)	L5(mm)	L6(mm)	C(mm)
SL-03-6M	452	420	98	475	232	250/410	500
SL-03-9M	452	420	135	425	232	250/410	500
SL-03-12M	452	420	180	442	232	250/410	500

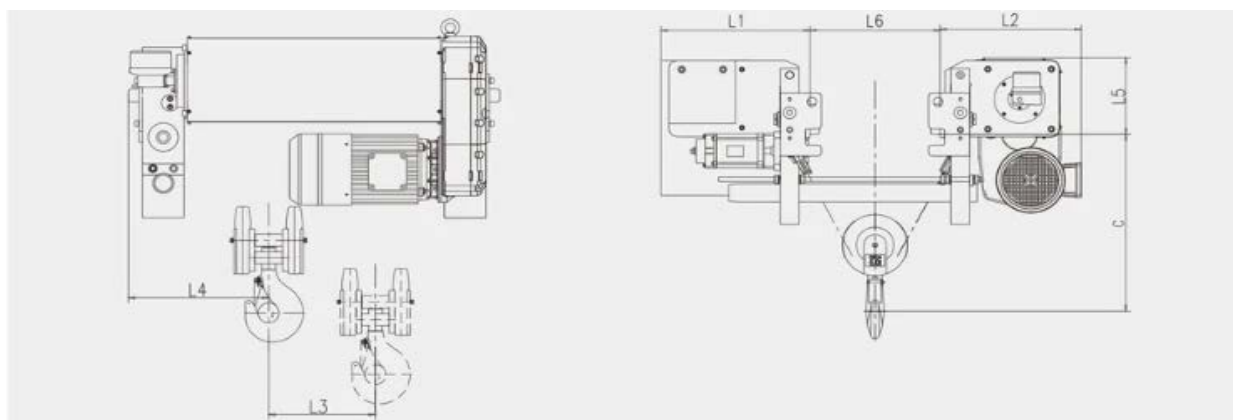



Product Parameter

Model	Working duty FEM(ISO)	Lifting speed (m/min)	Lifting motor (kW)	Traveling speed (m/min)	Traveling motor (kW)	Weight (kg)
SL-05-6M	2m(M5)	0.8/5	1/6.1	5-20	2*0.4	391
SL-05-9M	2m(M5)	0.8/5	1/6.1	5-20	2*0.4	395
SL-05-12M	2m(M5)	0.8/5	1/6.1	5-20	2*0.4	415
SL-05-15M	2m(M5)	0.8/5	1/6.1	5-20	2*0.4	438
SL-05-18M	2m(M5)	0.8/5	1/6.1	5-20	2*0.4	461

Product size

Model	L1(mm)	L2(mm)	L3(mm)	L4(mm)	L5(mm)	L6(mm)	C(mm)
SL-05-6M	452	420	98	475	254	250/410	590
SL-05-9M	452	420	135	425	254	250/410	590
SL-05-12M	452	420	180	442	254	250/410	590
SL-05-15M	452	420	225	442	254	250/410	590
SL-05-18M	452	420	270	442	254	250/410	590

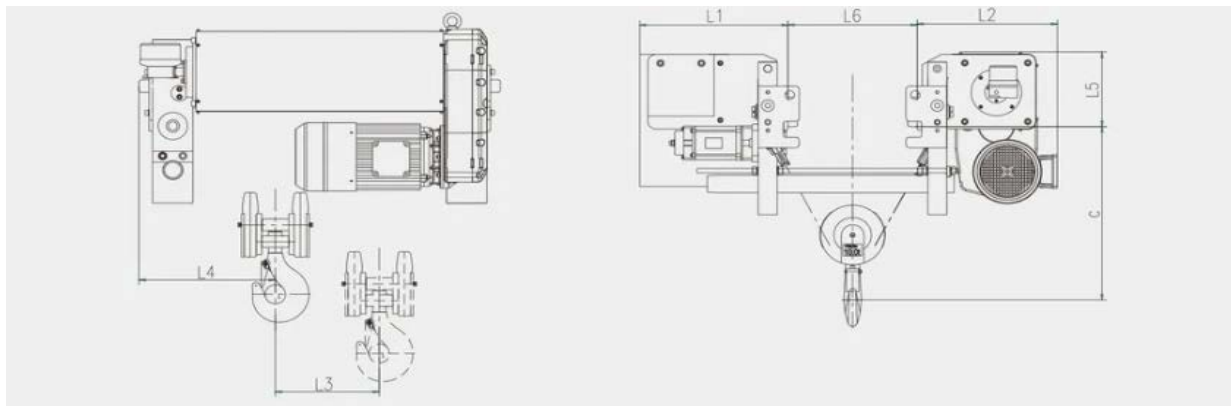


Product Parameter

Model	Working duty FEM(ISO)	Lifting speed (m/min)	Lifting motor (kW)	Traveling speed (m/min)	Traveling motor (kW)	Weight (kg)
SL-10-6M	2m(M5)	0.8/5	1.5/9.5	5-20	2*0.4	730
SL-10-9M	2m(M5)	0.8/5	1.5/9.5	5-20	2*0.4	736
SL-10-12M	2m(M5)	0.8/5	1.5/9.5	5-20	2*0.4	754
SL-10-15M	2m(M5)	0.8/5	1.5/9.5	5-20	2*0.4	789
SL-10-18M	2m(M5)	0.8/5	1.5/9.5	5-20	2*0.4	835

Product size

Model	L1(mm)	L2(mm)	L3(mm)	L4(mm)	L5(mm)	L6(mm)	C(mm)
SL-10-6M	510	576	89	553	321	300/450	740
SL-10-9M	510	576	133	553	321	300/450	740
SL-10-12M	510	576	178	553	321	300/450	740
SL-10-15M	510	576	233	465	321	300/450	740
SL-10-18M	510	576	267	465	321	300/450	740

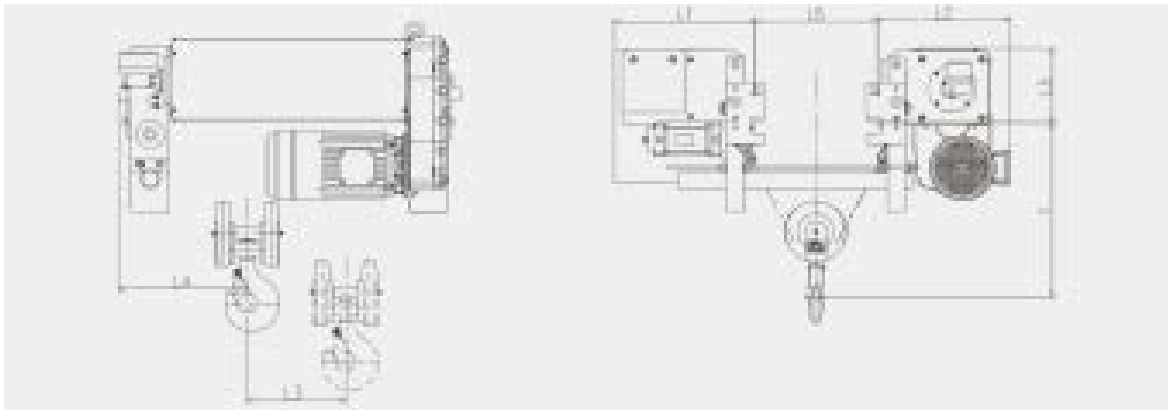

Product Parameter

Model	Working duty FEM(ISO)	Lifting speed (m/min)	Lifting motor (kW)	Traveling speed (m/min)	Traveling motor (kW)	Weight (kg)
SL-20-6M	1Am(M4)	0.66/4	2.6/16	5-20	2*0.96	730
SL-20-9M	1Am(M4)	0.66/4	2.6/16	5-20	2*0.96	1120
SL-20-12M	1Am(M4)	0.66/4	2.6/16	5-20	2*0.96	1189
SL-20-15M	1Am(M4)	0.66/4	2.6/16	5-20	2*0.96	1258
SL-20-18M	1Am(M4)	0.66/4	2.6/16	5-20	2*0.96	1328

Product size

Model	L1(mm)	L2(mm)	L3(mm)	L4(mm)	L5(mm)	L6(mm)	C(mm)
SL-20-6M	559	627	80	638	364	350/450	850
SL-20-9M	559	627	120	638	364	350/450	850
SL-20-12M	559	627	160	638	364	350/450	850
SL-20-15M	559	627	200	638	364	350/450	850
SL-20-18M	559	627	240	638	364	350/450	850