


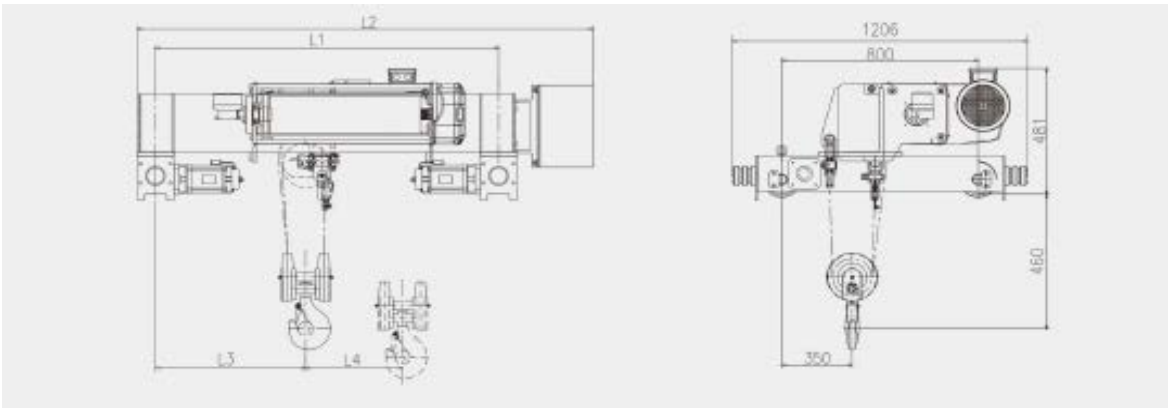

Product Parameter



Model	Working duty FEM(ISO)	Lifting speed (m/min)	Lifting motor (kW)	Traveling speed (m/min)	Traveling motor (kW)	Weight (kg)
DR-03-6M	2m(M5)	0.8/5	0.45/3.2	5-20	2*0.37	368
DR-03-9M	2m(M5)	0.8/5	0.45/3.2	5-20	2*0.37	425
DR-03-12M	2m(M5)	0.8/5	0.45/3.2	5-20	2*0.37	475

Product size

Model	L1(mm)	L2(mm)	L3(mm)	L4(mm)
DR-03-6M	1400	1862	634	90
DR-03-9M	1400	1862	600	135
DR-03-12M	1700	2162	705	180

Double girder electric
wire rope hoist

5t
RATIO: 4/1

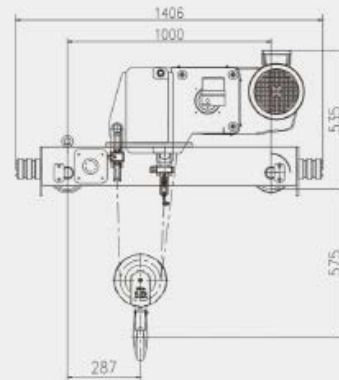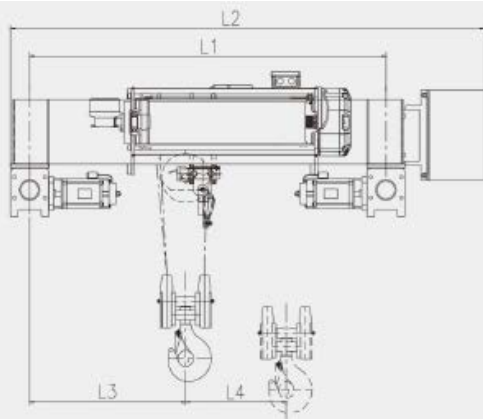


Product Parameter

Model	Working duty FEM(ISO)	Lifting speed (m/min)	Lifting motor (kW)	Traveling speed (m/min)	Traveling motor (kW)	Weight (kg)
DR-05-6M	2m(M5)	0.8/5	1/6.1	5-20	2*0.37	490
DR-05-9M	2m(M5)	0.8/5	1/6.1	5-20	2*0.37	521
DR-05-12M	2m(M5)	0.8/5	1/6.1	5-20	2*0.37	548
DR-05-15M	2m(M5)	0.8/5	1/6.1	5-20	2*0.37	589
DR-05-18M	2m(M5)	0.8/5	1/6.1	5-20	2*0.37	630

Product size

Model	L1(mm)	L2(mm)	L3(mm)	L4(mm)
DR-05-6M	1400	1862	634	90
DR-05-9M	1400	1862	600	135
DR-05-12M	1700	2162	745	180
DR-05-15M	2000	2462	887	225
DR-05-18M	2400	2862	1097	270

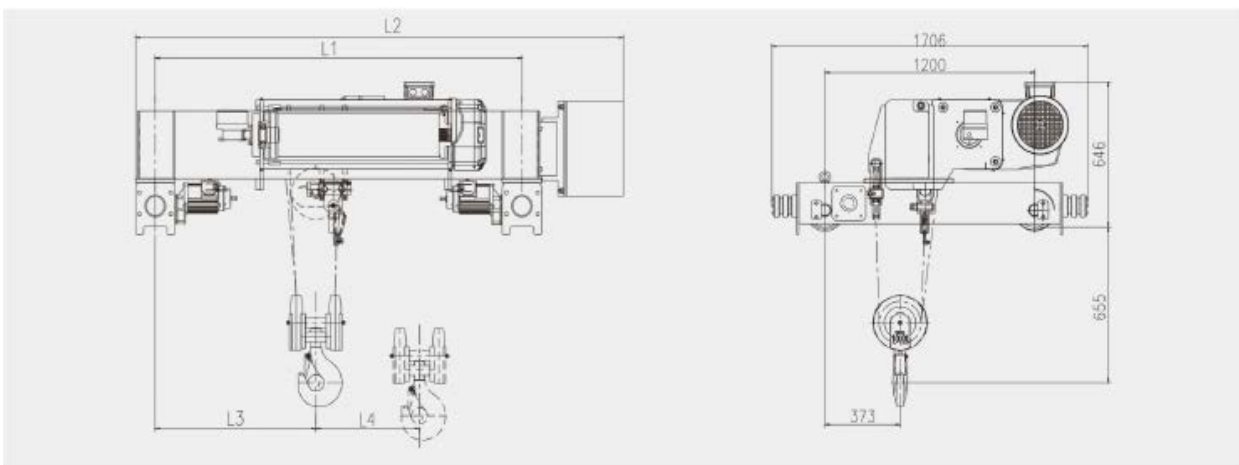

Product Parameter



Model	Working duty FEM(ISO)	Lifting speed (m/min)	Lifting motor (kW)	Traveling speed (m/min)	Traveling motor (kW)	Weight (kg)
DR-10-6M	2m(M5)	0.8/5	1. 5/9. 5	5-20	2*0. 4	777
DR-10-9M	2m(M5)	0.8/5	1. 5/9. 5	5-20	2*0. 4	802
DR-10-12M	2m(M5)	0.8/5	1. 5/9. 5	5-20	2*0. 4	857
DR-10-15M	2m(M5)	0.8/5	1. 5/9. 5	5-20	2*0. 4	916
DR-10-18M	2m(M5)	0.8/5	1. 5/9. 5	5-20	2*0. 4	980

Product size

Model	L1(mm)	L2(mm)	L3(mm)	L4(mm)
DR-10-6M	1400	1840	612	90
DR-10-9M	1400	1840	612	133
DR-10-12M	1700	2140	690	177
DR-10-15M	2000	2440	876	222
DR-10-18M	2400	2840	1062	267

Double girder electric
wire rope hoist

20t
RATIO: 4/1

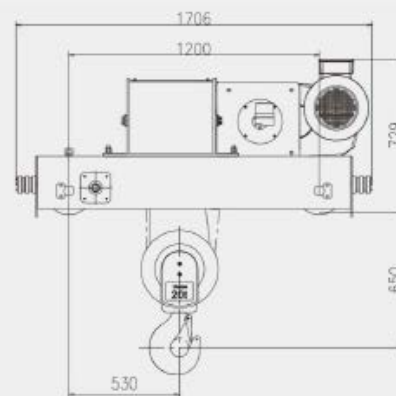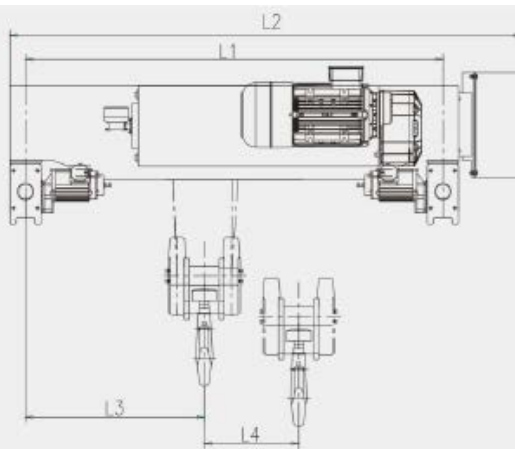


Product Parameter

Model	Working duty FEM(ISO)	Lifting speed (m/min)	Lifting motor (kW)	Traveling speed (m/min)	Traveling motor (kW)	Weight (kg)
DR-20-6M	1Am(M4)	0.6/4	2.6/16	5-20	2*0.75	1265
DR-20-9M	1Am(M4)	0.6/4	2.6/16	5-20	2*0.75	1353
DR-20-12M	1Am(M4)	0.6/4	2.6/16	5-20	2*0.75	1437
DR-20-15M	1Am(M4)	0.6/4	2.6/16	5-20	2*0.75	1532
DR-20-18M	1Am(M4)	0.6/4	2.6/16	5-20	2*0.75	1616

Product size

Model	L1(mm)	L2(mm)	L3(mm)	L4(mm)
DR-20-6M	1400	1850	661	110
DR-20-9M	1700	2150	736	165
DR-20-12M	2000	2450	856	220
DR-20-15M	2400	2850	1056	275
DR-20-18M	2700	3150	1156	330

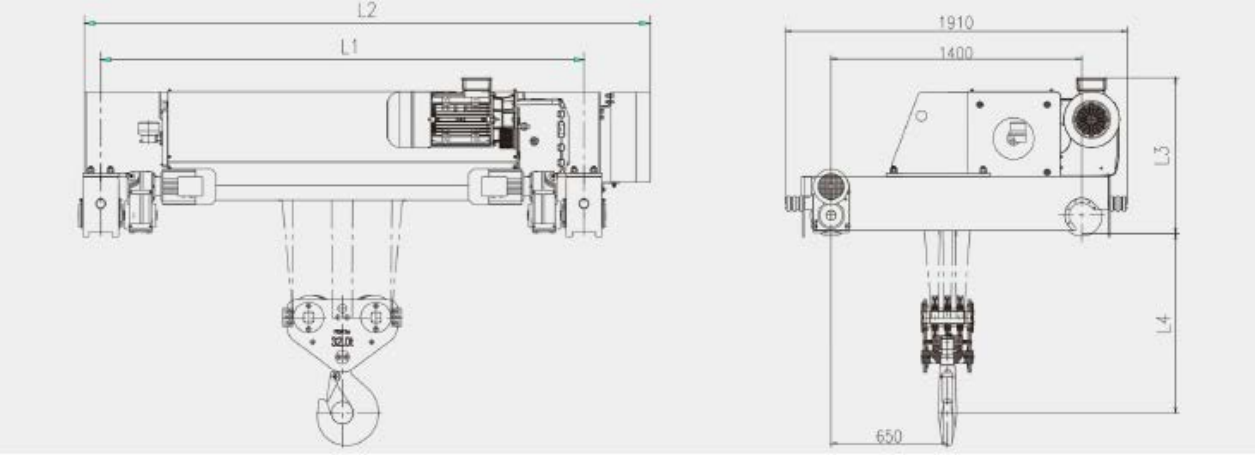

Product Parameter


Model	Working duty FEM(ISO)	Lifting speed (m/min)	Lifting motor (kW)	Traveling speed (m/min)	Traveling motor (kW)	Weight (kg)
DR-32-6M	2m(M5)	0.8/3.3	5.5/20	5-20	2*1.5	2053
DR-32-9M	2m(M5)	0.8/3.3	5.5/20	5-20	2*1.5	2153
DR-32-12M	2m(M5)	0.8/3.3	5.5/20	5-20	2*1.5	2303
DR-32-15M	2m(M5)	0.8/3.3	5.5/20	5-20	2*1.5	2400
DR-32-18M	2m(M5)	0.8/3.3	5.5/20	5-20	2*1.5	2519

Product size

Model	L1(mm)	L2(mm)	L3(mm)	L4(mm)
DR-32-6M	2000	2460	865	998
DR-32-9M	2400	2860	865	998
DR-32-12M	2700	3160	865	998
DR-32-15M	3100	3560	865	998
DR-32-18M	3400	3860	865	998

Double girder electric
wire rope hoist

40t
RATIO: 8/2

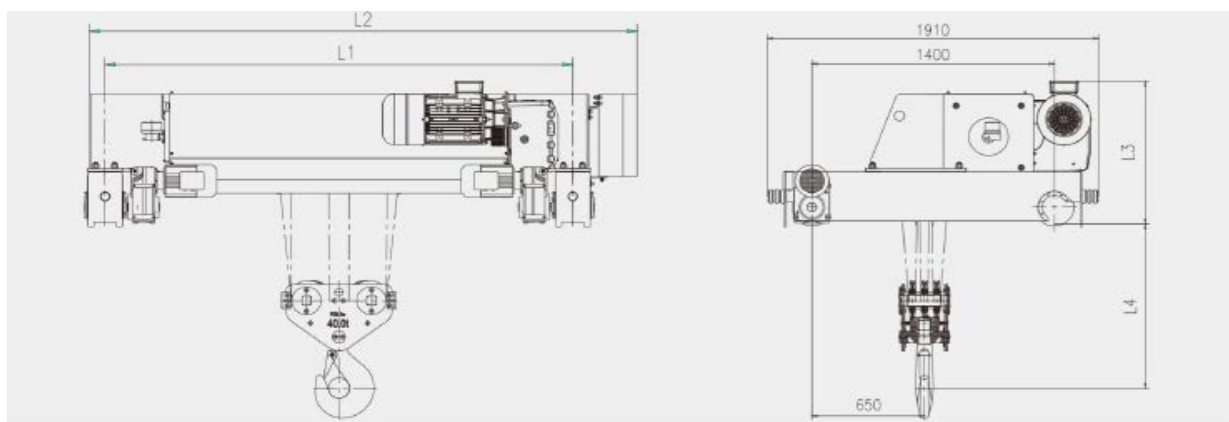

Product Parameter



Model	Working duty FEM(ISO)	Lifting speed (m/min)	Lifting motor (kW)	Traveling speed (m/min)	Traveling motor (kW)	Weight (kg)
DR-40-6M	1Am(M4)	0.8/4.9	38	5-20	2*2.2	2812
DR-40-9M	1Am(M4)	0.8/4.9	38	5-20	2*2.2	2829
DR-40-12M	1Am(M4)	0.8/4.9	38	5-20	2*2.2	3009
DR-40-15M	1Am(M4)	0.8/4.9	38	5-20	2*2.2	3159
DR-40-18M	1Am(M4)	0.8/4.9	38	5-20	2*2.2	3337

Product size

Model	L1(mm)	L2(mm)	L3(mm)	L4(mm)
DR-40-6M	2000	2660	1079	865
DR-40-9M	2000	2660	1079	865
DR-40-12M	2400	3060	1079	865
DR-40-15M	2700	3360	1079	865
DR-40-18M	3100	3760	1079	865

Double girder electric
wire rope hoist

50t
RATIO: 12/2

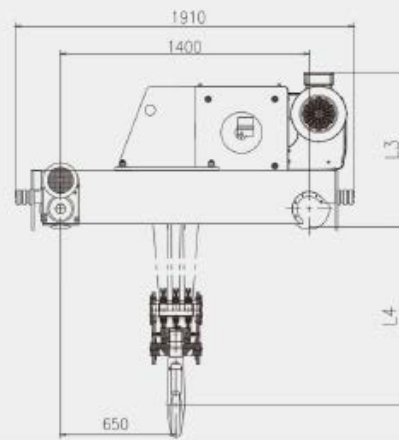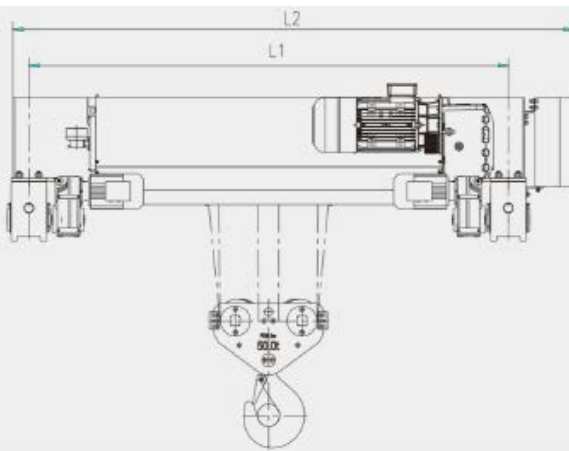

Product Parameter

Model	Working duty FEM(ISO)	Lifting speed (m/min)	Lifting motor (kW)	Traveling speed (m/min)	Traveling motor (kW)	Weight (kg)
DR-50-6M	2m(M5)	0/3.3	38	5-20	2*2.2	3040
DR-50-9M	2m(M5)	0/3.3	38	5-20	2*2.2	3312
DR-50-12M	2m(M5)	0/3.3	38	5-20	2*2.2	3512
DR-50-15M	2m(M5)	0/3.3	38	5-20	2*2.2	3723
DR-50-18M	2m(M5)	0/3.3	38	5-20	2*2.2	3959

Product size

Model	L1(mm)	L2(mm)	L3(mm)	L4(mm)
DR-50-6M	2000	2660	1072	900
DR-50-9M	2700	3360	1072	900
DR-50-12M	3100	3760	1072	900
DR-50-15M	3400	4060	1072	900
DR-50-18M	3800	4460	1072	900